

Schlüter®-TREP-FL

Stair nosing profile
for decorative steps

3.4

Product data sheet

Application and Function

Schlüter®-TREP-FL is an aluminium or stainless steel stair nosing profile in Flor-entine design for enhancing the safety and visual appeal of stair edges.

It is designed for installation in steps with tile or natural stone coverings.

Schlüter®-TREP-FL is intended for use in residential or similarly used interior applications with low foot traffic. The profile is solidly embedded in the covering and cannot be replaced when it becomes worn (our stair-nosing profiles Schlüter®-TREP-S and -B as well as Schlüter®-TREP-G feature a replaceable tread).

Schlüter®-TREP-FL protects the front edge of steps and increases visibility providing a defined edge between the vertical and horizontal edge of the step, in support of safety on stairs. The aluminium profile has an additional slip resistant tread. Matching end caps are available as accessories.

Material

Schlüter®-TREP-FL is available in anodised aluminium (-FLAE), stainless steel (-FLE), and brushed stainless steel (-FLEB).

Material properties and areas of application

The suitability of a proposed type of profile must be verified based on the anticipated chemical, mechanical, and/or other stresses.


Schlüter®-TREP-FL is intended for use in residential or similarly used interior applications with low foot traffic.

The information provided below is intended as a general guideline.



Schlüter®-TREP-FLAE, made of anodised aluminium, has an anodised surface finish that will not change under normal circumstances. The surface must be protected against abrasion or scratching.

Cementitious materials, in conjunction with moisture, become alkaline. Since aluminium is sensitive to alkaline substances, exposure to the alkali (depending on the concentration and duration of exposure) may result in corrosion (aluminium hydroxide formation). For this reason, remove mortar or grouting material immediately from all visible areas and do not cover freshly installed coverings with foil. In addition, ensure that the profile is solidly embedded in the setting material to prevent water from accumulating in small cavities.

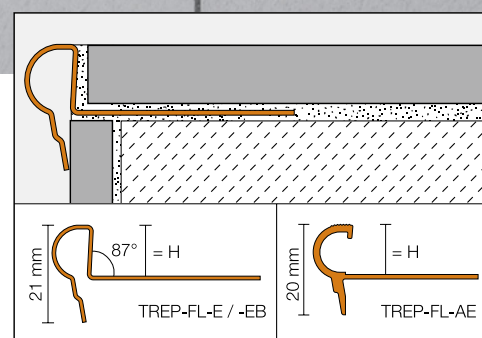



Schlüter®-TREP-FLE/-FLEB is made of roll formed stainless steel V2A (material no. 1.4301). The profile structure therefore differs slightly from the appearance of the extruded aluminium versions.

Stainless steel is particularly well suited for applications that, in addition to heavy mechanical stresses, require resistance to chemicals such as acidic or alkaline detergents. Even stainless steel is not resistant to all chemical stresses, and may be affected by hydrochloric and hydrofluoric acid or certain chloride and brine concentrations. Special anticipated stresses should therefore be verified in advance.

Installation

1. Select Schlüter®-TREP-FL according to tile thickness.
2. Set the covering material on the riser so that the top edge of the covering is at the correct height.
3. Apply suitable tile adhesive along the edge area above the riser.
4. Press Schlüter®-TREP-FL completely into the adhesive bed and align, making sure that the front edge of the profile overlaps the riser tile.
5. Fill the cavity at the front edge of the profile with suitable tile adhesive before installing the tiles.
6. Completely cover the perforated anchoring leg and the tread area with tile adhesive.
7. Firmly press the tread tile into place and adjust it in such a way that the tiled surface is flush with the top of the profile.

Product Overview

Schlüter®-TREP-FL

AE = anodised aluminium, E = stainless steel,
EB = brushed stainless steel

Length supplied: 2.5 m, 1.5 m, 1 m

Material	AE	E	EB
H = 9 mm	•	•	•
H = 11 mm	•	•	•
H = 12.5 mm	•	•	•


All tiles in the profile area must be solidly bedded.

8. A joint of approximately 2 mm should be left between the tile and the profile.
9. Fill the joint completely with grout.

Maintenance

Schlüter®-TREP-FL requires no special maintenance or care. Damaged anodised surfaces can be restored with paint. Stainless steel surfaces exposed to the environment or aggressive substances should be cleaned periodically using a mild household cleaner. Regular cleaning maintains the neat appearance of stainless steel and reduces the risk of corrosion. All cleaning agents must be free of hydrochloric and hydrofluoric acid.

Avoid the contact with other metals, such as regular steel, to prevent corrosion. This also includes installation tools such as trowels or steel wool, e.g. for the removal of mortar residue. We recommend the use of the stainless steel cleaning polish Schlüter®-CLEAN-CP.

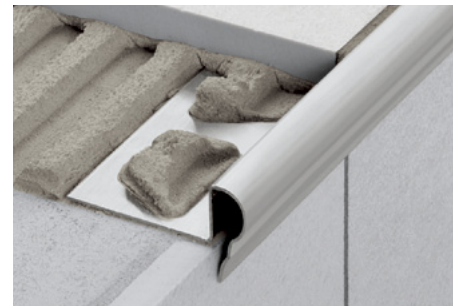

Text template for tenders:

_____ units of Schlüter®-TREP-FL
as a stair nosing profile with protruding rounded edge in

- AE = anodised aluminium
- E = stainless steel
- EB = brushed stainless steel

with a trapezoid perforated anchoring leg and install as a stair nosing profile according to manufacturer's specifications.

Matching end caps for the stair nosings

- are to be included in unit prices.
- are to be charged as extra.

In individual lengths of _____m

Profile height: _____mm

Art.-No.: _____

Material: _____ /Piece

Labour: _____ /Piece

Total: _____ /Piece