

Schlüter®-KERDI

Waterproof Membrane
for substrate protection

8.1

Product data sheet

Application and Function

Schlüter®-KERDI is a crack bridging waterproof membrane made of soft polyethylene, which has been covered on both sides with a special fleece webbing to anchor the membrane in suitable tile adhesive.

Schlüter®-KERDI features imprinted gridlines on one side for easier cutting. In addition to indicating how much material is left, the imprint also shows the minimum overlap width of 5 cm for working with multiple membrane sheets.

Schlüter®-KERDI was developed as a bonded waterproofing assembly with ceramic tile and natural stone coverings and is therefore suitable for applications in accordance with the German standards DIN 18531*, DIN 18534, and DIN 18535*. Water exposure classes according to DIN 18534: W0-I to W3-I*.

Furthermore, Schlüter®-KERDI features the national technical approval (abP) required in Germany.

Moisture load class according to ZDB: 0 to B0 and A, B and C. Schlüter®-KERDI features European Technical Approval (ETA) pursuant to ETAG 022 (watertight covering kits) and bears a CE mark.

* With abP and/or in compliance with ETA according to ETAG 022. Please contact our Application Technology department for further information regarding use and installation.


The waterproofing membrane should be bonded to an even, load bearing substrate with an appropriate adhesive. The tiles are laid directly on Schlüter®-KERDI using the appropriate adhesive and bedding for the chosen tile or stone. Other trowel applied covering materials or plaster may also be used.



Schlüter®-KERDI-DS is a waterproofing membrane and vapour barrier bonded to a tile covering, e.g. for use in swimming pools and spa areas, as well as for commercial applications with high humidity levels.

Vapour barriers are suggested for moisture sensitive substrates such as wood, plasterboard and gypsum plaster.

Accessories for Schlüter®-KERDI include internal and external corners, as well as pipe collars. To seal butt joints or corner joints, Schlüter®-KERDI-KEBA, in widths of 8.5, 12.5, 15, 18.5 and 25 cm is available. Schlüter®-KERDI-FLEX, in widths of 12.5 cm or 25 cm, is used to seal over expansion joints or flexible edge joints.

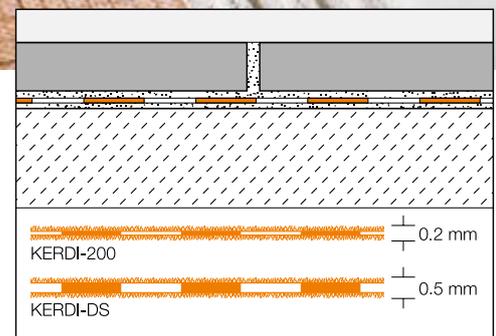



Material

Schlüter®-KERDI-200 is a polyethylene membrane for bonded waterproofing assemblies with a water vapour retardant value of $s_d = 5.15$ m.

Schlüter®-KERDI-DS is a special polyethylene membrane for bonded waterproofing assemblies and serves as a vapour barrier with an s_d value of more than 100 m, which is considered a vapour barrier in physical construction terms. The waterproofing membrane is 0.5 mm thick and equipped with water vapour blocking additives.

The material is physiologically harmless. Cutting waste of both material types is not classified as hazardous waste. Polyethylene is not UV stable in the long term; the product should not be stored in places with prolonged exposure to direct sunlight.

Note

Since bonded waterproofing assemblies with Schlüter®-KERDI do not have the necessary uncoupling function for screed and tile coverings in outdoor areas that are subject to temperature changes, we recommend the use of Schlüter®-KERDI in conjunction with Schlüter®-DITRA-DRAIN (see product data sheet 6.2) or Schlüter®-DITRA 25 (see product data sheet 6.1) for a combined bonded waterproofing and uncoupling function.

Material properties and areas of application

Schlüter®-KERDI is waterproof and resistant to most chemicals commonly encountered in tiled environments. It is resistant to ageing, does not rot and is characterised by its elasticity.

Schlüter®-KERDI is highly resistant to saline solutions, acid and alkaline solutions, many organic solvents, alcohols and oils. Information regarding its resistance to specific stresses can be provided if concentration, temperature and period of exposure are known. Verify that the substrate on which Schlüter®-KERDI is to be placed is even, load bearing and free from moisture. Surfaces which inhibit proper adhesion must be removed or appropriately treated.

Schlüter®-KERDI is suitable for wall and floor surfaces where protection against the penetration of moisture or other harmful substances is necessary.

Surfaces include bath tub surrounds, showers and areas surrounding swimming pools. Industrial applications include, the food industry, breweries and dairies.

Swimming pools and similar structures are subject to special requirements. Please contact us for further information if you are planning this type of project.



Installation of Schlüter®-KERDI

1. The substrate must be free of bond inhibiting components, be load bearing and even. Any unevenness in the substrate must be levelled prior to the application of Schlüter®-KERDI.
2. The type of bonding adhesive used to apply Schlüter®-KERDI depends on the type of substrate. The adhesive must bond to the substrate and mechanically anchor the fleece on the underside of the Schlüter®-KERDI matting. Verify the compatibility of all materials prior to installation.
Note:
System tested adhesive must be used in areas that require special approval of the authorities. Please contact us at the address shown in this data sheet for more details.
3. Apply the bonding adhesive to the substrate using a 3 x 3 mm or 4 x 4 mm notched trowel.
4. Individual courses of Schlüter®-KERDI are cut to size. Solidly embed the anchoring fleece on the underside in the adhesive so that its entire surface is bonded. Work the material into the adhesive with the smooth side of a notched trowel or a float, exerting pressure on the Schlüter®-KERDI matting in diagonal strokes. Avoid the formation of air bubbles and observe the open time of the bonding adhesive.
5. Overlap the joints of the KERDI membranes by at least 5 cm or abut the joints and fully cover the joint with Schlüter®-KERDI-KEBA, using the sealing adhesive Schlüter®-KERDI-COLL-L.
6. Use the pre-fabricated KERDI corners for internal and external corners. Schlüter®-KERDI-KEBA must be adhered to corner joints in the same manner. Use Schlüter®-KERDI-KM (pipe collar) for pipe penetrations. Functional connections to fixed structural components can be created as well. Depending on the situation of the construction site, Schlüter®-KERDI, -KERDI-KEBA or -KERDI-FLEX can be attached to the adjoining structural element with Schlüter®-KERDI-FIX to create a waterproof connection (see Product Data Sheet 8.3, Schlüter®-KERDI-FIX).
7. Clamp or tightly adhere a 50 cm x 50 cm piece of Schlüter®-KERDI onto the flange of the floor drains constructed

in the thin-bed method as a connector collar. Then bring the Schlüter®-KERDI mat within 10 cm of the floor drain and adhere it to the connector collar without leaving air pockets. Schlüter®-KERDI-DRAIN is a floor drain specifically designed to allow connections to a bonded waterproofing membrane. This allows the simple and fast connection of Schlüter®-KERDI to the floor drain, using the Schlüter®-KERDI collar.

Note regarding floor drains:

Schlüter®-KERDI-DRAIN and Schlüter®-KERDI-LINE are components that were specifically developed for connection to bonded waterproofing assemblies. Schlüter®-KERDI can be quickly and reliably abutted in these cases with the use of Schlüter®-KERDI collars.

8. Cut Schlüter®-KERDI above structural and seismic expansion joints, then cover the joint with Schlüter®-KERDI-FLEX. Schlüter®-KERDI-FLEX can also be used for flexible finishing edges. Alternatively, Schlüter®-KERDI-KEBA may be used, provided a loose fold is left above the joint.
9. The covering can be installed as soon as the entire waterproofing assembly is tightly sealed at all overlaps, corners and joints. No waiting is required.
For the installation of tile, apply dry setting thin-bed adhesive directly over Schlüter®-KERDI and fully embed the tiles in the adhesive.
Suitable reactive resin adhesives and grout adhesive must be used for coverings that are likely to be exposed to chemicals. Exclusively use system-approved thin bed adhesives for areas that require CE conformity or compliance with the general certificate of national technical approval (abP). Please contact us at the address shown in this data sheet for further information about suitable adhesives and the corresponding test certificates.

Product Overview

Schlüter®-KERDI 200 Thickness = 0.2 mm

Length = m	5	10	30
Width = 1 m	•	•	•

Schlüter®-KERDI-DS

Thickness = 0.5 mm

Length = m	30
Width = 1 m	•



System products for bonded waterproofing

Ⓐ Schlüter®-KERDI-KEBA (Band)

Thickness = 0.1 mm

Length = m	5	30
Width = 8.5 cm	•	•
Width = 12.5 cm	•	•
Width = 15 cm	•	•
Width = 18.5 cm	•	•
Width = 25 cm	•	•

Ⓑ Schlüter®-KERDI-FLEX

Thickness = 0.3 mm

Length = m	5	30
Width = 12.5 cm	•	•
Width = 25 cm	•	•

Ⓒ Schlüter®-KERDI-KM (Pipe collar)

Thickness = 0.1 mm

Dim. Ø 15 cm / Hole Ø 22 mm	
KM 5117 / 22	Set = 5 pieces

Ⓓ Schlüter®-KERDI-KERECK

Thickness = 0.1 mm

Internal Corner	2 Pc.	5 Pc.	10 Pc.
Prefabricated 90° part	•		•
Prefabricated 135° part	•		
Pre cut section		•	
External Corner	2 Pc.	5 Pc.	10 Pc.
Prefabricated 90° part	•		•
Pre cut section		•	

Ⓔ Schlüter®-KERDI-KERS

Thickness = 0.1 mm

Internal		
Prefabricated internal corner piece	left	right
H = 20 mm	•	•
H = 28 mm	•	•

Schlüter®-KERDI-KERS 20 products are suitable for showers with side lengths of 80-110 cm, while Schlüter®-KERDI-KERS 28 products are suitable for showers with side lengths of 110-150 cm.

Ⓕ Schlüter®-KERDI-COLL-L (Sealant adhesive)

Tub	4.25 kg
Tub	1.85 kg
see product data sheet 8.4	

Ⓖ Schlüter®-KERDI-FIX (Installation adhesive)

G = Grey, BW = Brilliant White

Colour	G	BW
Cartridge 290 ml	•	•
see product data sheet 8.3		

Schlüter®-KERDI-DRAIN (Point drains)

Ⓜ

see product data sheet 8.2

Schlüter®-KERDI-LINE (Linear drains)

Ⓝ

see product data sheet 8.7

Schlüter®-KERDI-SHOWER (Sloped trays for KERDI-DRAIN and -LINE)

Ⓝ

see product data sheet 8.8

Schlüter®-KERDI-TS Sealing strip for baths and preformed trays

Ⓝ

see product data sheet 8.9



**Text template for tenders:**

Supply and bond – including the required overlapping and connections – in a professional manner and according to the manufacturer's specifications

_____ m² Schlüter®-KERDI 200 as a crack bridging polyethylene waterproofing membrane with fleece webbing laminated on both sides for the purpose of anchoring the membrane in the tile adhesive. To be used as waterproofing on an even, load bearing substrate in the form of

- a wall made of _____
- floor made of _____

with appropriate

- adhesive as recommended by the supplier
- adhesive, type _____

Connections to pipe ducts and floor drains

- are to be included in unit prices
- are to be charged as extra

A building permit for the tendered area is

- not required
- required for load class
 - A: Wet rooms with heavy exposure to water
 - B: Swimming pools, liquid containers
 - C: Chemical exposure

Material: _____/m²

Labour: _____/m²

Total: _____/m²

Text template for tenders:

Supply and bond in a professional manner and according to the manufacturer's specifications

_____ per metre Schlüter®-KERDI-KEBA as polyethylene waterproofing band with a fleece webbing laminated on both sides in order to seal

- butt joints
- floor to wall transitions
- connections

of the Schlüter®-KERDI waterproofing membrane to fixed elements.

Internal and external corners as well as other prefabricated pieces

- are to be included in unit prices.
- are to be charged as extra.

Width of the Schlüter®-KERDI-KEBA:

- 8.5 cm 12.5 cm 15 cm
- 18.5 cm 25 cm

Material: _____/m

Labour: _____/m

Total: _____/m

Text template for tenders:

_____ m² Schlüter®-KERDI-DS as a vapour-retarding, crack bridging polyethylene waterproofing mat with anchoring fleece laminated on both sides to bond with the tile adhesive, to be supplied and professionally installed on a level and load bearing substrate, while observing the manufacturer's instructions, on

- a wall made of _____
- floor made of _____

with appropriate

- adhesive as recommended by the supplier
- adhesive, type _____

Connections to pipe ducts and floor drains

- are to be included in unit prices
- are to be charged as extra

A building permit for the tendered area is

- not required
- required for load class
 - A: Wet rooms with heavy exposure to water
 - B: Swimming pools, liquid containers

Material: _____/m²

Labour: _____/m²

Total: _____/m²

Text template for tenders:

Supply and bond in a professional manner and according to the manufacturer's specifications

_____ per metre Schlüter®-KERDI-FLEX as a highly flexible joint sealing tape of polyethylene foil with anchoring fleece laminated on both sides to

- flexible butt joints
- flexible floor to wall transitions
- flexible connections of the Schlüter®-KERDI waterproofing membrane to fixed elements.

Width of Schlüter®-KERDI-FLEX:

- 12.5 cm 25 cm

Material: _____/m

Labour: _____/m

Total: _____/m

Text template for tenders:

Supply and bond in a professional manner and according to the manufacturer's specifications

_____ pieces Schlüter®-KERDI-KM as polyethylene pipe collar with a fleece webbing laminated on both sides.

Material: _____/Piece

Labour: _____/Piece

Total: _____/Piece

