

Schlüter®-REMA

Tile magnets
for concealed access panels

11.1
Product data sheet

Application and Function

Schlüter®-REMA is the ideal system for creating concealed access panels in tiled wall coverings. Schlüter®-REMA's installation is independent of tile size and thickness and enables exact matching of the access panel to the overall joint design. Thus, panels that access electrical or plumbing components, for example, do not spoil the visual appearance of the tiles.

Material


Schlüter®-REMA assembly kit consists of four aluminium brackets with moulded casings containing magnets clamped to lateral, moveable guide shoes, and four ferromagnetic metal counterplates.



Material properties and areas of application

Schlüter®-REMA is suited for creating concealed access panels in wall coverings. If the access opening is substantially larger than 30 cm x 30 cm, it may be necessary to install two additional magnets.

In special cases, the suitability of Schlüter®-REMA must be verified, based on anticipated chemical, mechanical, and/or other stresses.

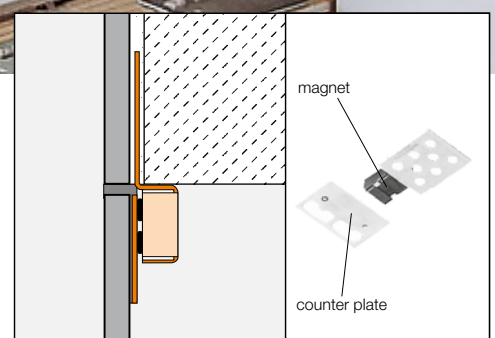



Installation


1. First, adhere an aluminium bracket to the back of each perimeter tile with tile adhesive so that the magnet extends beyond the tile's edge.
2. Set tiles with the magnets attached as perimeter limits, so that four magnets extend into the access opening.
3. To form the access panel cover, connect the corresponding number of tiles by attaching a tile to their backs with tile adhesive.
4. Using silicone, adhere the counterplates to the back of the panel cover in alignment with the perimeter magnets.
5. After the silicone has cured, install the cover and seal the surrounding joint with a colour co-ordinated sealing compound.

Maintenance

Schlüter®-REMA does not require any special maintenance.

Text template for tenders:

Supply
_____ Piece(s) Schlüter®-REMA as
an assembly kit for concealed access panels,
consisting of four aluminium brackets with
moulded casings containing magnets clamped
to lateral, moveable guide shoes, and four fer-
romagnetic metal counter-plates, and install
according to manufacturer's installation instruc-
tions.
Art.-No.: _____
Material: _____/Piece
Labour: _____/Piece
Total: _____/Piece

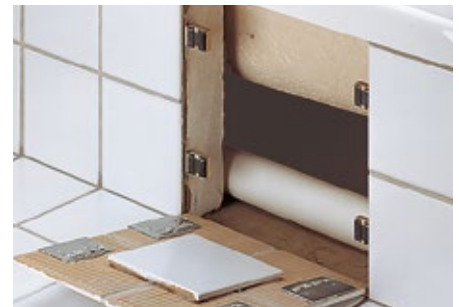

Product Overview

Schlüter®-REMA

Set
4 magnets + 4 counter plates